

**U-BOAT**  
INDUSTRIAL USE



## Deck Features



- Engineered for durability, longevity and extreme use
- Bottom cross brace rests on deck to provide load containment
- Handle extends through deck for improved retention in the deck
- Center tilt allows easy navigation over thresholds and bumps
- 360-degree maneuverability in aisles and most coolers
- High efficiency tire treads for easy rolling and reduction of push-and-pull effort by drivers during delivery

P/N

BDHA162

Shown with 6" casters.

## Handle Benefits



P/N

306150

- Modular construction offers service parts vs. total handle replacement
- Hardware secured with automotive grade thread locking bolts for superior performance
- Ergonomic oval handle shaped for comfort
- Industrial grade engineered for controlled handling
- Grooved surface for positive grip

### SPECIFICATIONS

Deck	18" wide x 60" long
Weight	80 lbs.
Capacity	1,500 lbs. route delivery 1,800 lbs. in-store use
Handles	48" high
Casters	6" or 8" x 2"



*Robotically welded five-box aluminum construction optimized for over-the-road payload.*

# Accessories

## CONTAINMENT CURTAIN



P/N	WT.(LBS.)
306020	4.0

Containment curtain securely holds the highest payload per U-Boat.

## QUICK PICK ADAPTER



P/N	WT.(LBS.)
306082	5.0

The quick pick adapter option allows users to utilize walkie-riders to speed order picking. Two U-Boats fit securely on a walkie-riider allowing warehouse order picking from both sides. U-Boat must have 6" TPR casters. Incompatible with foot brake option.


## CURB RAMP



P/N	W"	L"	WT.(LBS.)
RDCR	29	44	43.0

The 3,000 pound capacity curb ramp has a 9" height range. The twin-tooth deck design offers a 26" usable width that provides traction in either direction.

## KEG MOVER

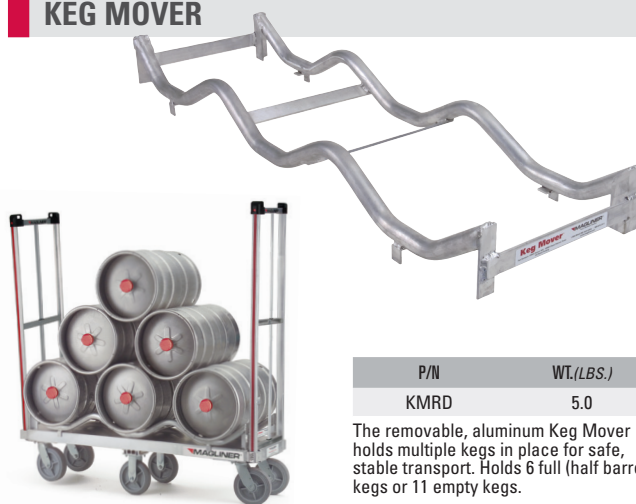

P/N	WT.(LBS.)
KMRD	5.0

The removable, aluminum Keg Mover holds multiple kegs in place for safe, stable transport. Holds 6 full (half barrel) kegs or 11 empty kegs.

# Options



P/N	WT.(LBS.)
349530 6" Casters	8.0
349500 8" Casters	8.0

The foot brake helps hold the U-Boat in place on inclines or when loading products.



P/N	D"	W"	WT.(LBS.)
130066 Swivel	6	2	5.0
130067 Rigid	6	2	4.0
130079 Swivel	8	2	6.0
130029 Rigid	8	2	5.0

Heavy duty thermoplastic rubber casters.

# U-BOAT

INDUSTRIAL USE



[www.aelift.com](http://www.aelift.com)

📍 Allstate Equipment Company Inc  
1201 McCloud Rd | Chesapeake, VA 23320 | USA

☎  
✉ [sales@aelift.com](mailto:sales@aelift.com)