

MOTORIZED HAND TRUCK



MOTORIZED HAND TRUCK

Ergonomic thumb throttle moves forward/reverse without changing gears.

Attachment release handle.

Rear wheel can be stowed when not in use, and has (4) four adjustable height positions.

Manual Park Brake release allows operator to push machine.

Removable battery box can be charged on or off the truck.

Push-too-fast safety prevents runaway situation even when park brake has been manually released.


SPECIFICATIONS

| | |
|---------------------------------|--------------------|
| Capacity | 1000 lbs. |
| Capacity, 3:1 Ramp | 850 lbs. |
| Weight | 212 lbs. |
| Speed (fwd & rev) | 0-4.3 mph variable |
| System Voltage | 36 Volts DC |
| Range (Continuous/Intermittent) | 2 hrs. / 8+ hrs. |
| Recharge Time | 6 hrs. Max |

MODEL SHOWN

MHT75BA

DIMENSIONS

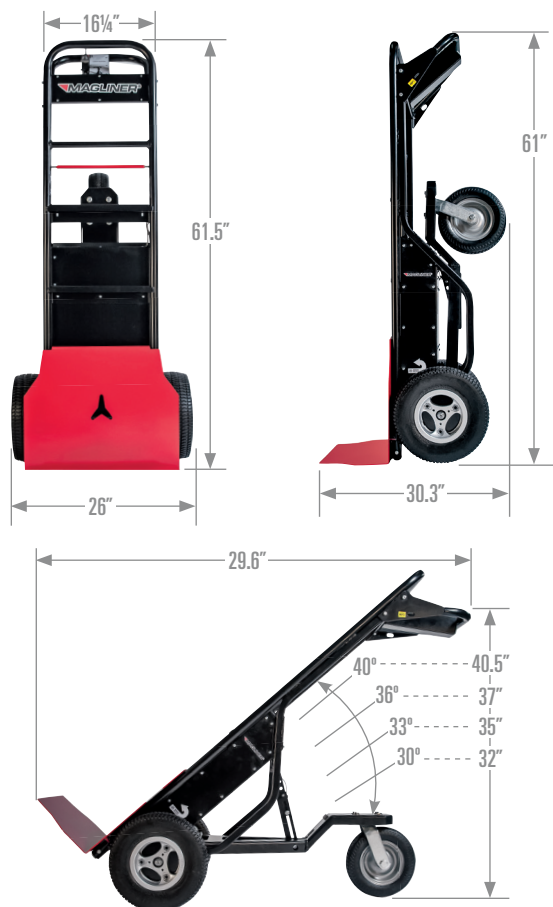

VERSATILITY

The patented quick-attach feature allows user to change out attachments in seconds, without the use of tools. Each attachment securely fastens to the hand truck without the use of pins or bolts.



Flat Plate Attached and Locked.

Capture/Release by Leaning Truck Forward and Pulling Release Handle.

Flat Plate Released.

MOTORIZED HAND TRUCK

SAFETY FEATURES



ATTACHMENT OPTIONS



| P/N | W" | D" | WT. (LBS.) |
|--------|------|----|------------|
| 450146 | 21-½ | 10 | 29 |

Front plate for moving stackable items.



| P/N | W" | D" | WT. (LBS.) |
|--------|------|----|------------|
| 450156 | 21-½ | 4 | 26 |

Tent pole pusher is used to push or pull tent poles into place.



| P/N | W" | D" | WT. (LBS.) |
|--------|----|----|------------|
| 450161 | 23 | 6 | 44 |

Cylinder or inflatable attachment. Carries up to two high-pressure cylinders.



| P/N | L" | W" | WT. (LBS.) |
|--------|----|----|------------|
| 450149 | 10 | 18 | 31 |

Trailer hitch with five standard 2" receivers. 3,500 lbs. towing capacity on hard, level surface.

DRIVE WHEEL OPTIONS



| P/N | D" | WT. (LBS.) |
|-------|----|------------|
| 10993 | 13 | 10 |

Foam filled tire is maintenance free.



| P/N | D" | WT. (LBS.) |
|-------|----|------------|
| 10992 | 13 | 8 |

Tube-type pneumatic tire.



| P/N | D" | WT. (LBS.) |
|------------------|----|------------|
| 10995L 10995R | 13 | 8 |

Tube-type pneumatic tire with aggressive tread pattern.



| P/N | D" | WT. (LBS.) |
|------------------|----|------------|
| 10100L 10100R | 13 | 18 |

Tube-type dual pneumatic tires with aggressive tread pattern. Increases truck overall width to 34".

ACCESSORIES



| P/N | L' | W" | WT. (LBS.) |
|--------|----|----|------------|
| 450003 | 10 | 2 | 2.8 |

Retractable ratchet strap has 3300 lbs. maximum load and 1100 lbs. working load capacity.



| P/N | WT. (LBS.) |
|--------|------------|
| 460097 | 35.8 |

Battery box assembly complete with three 12V batteries (36V total).

MOTORIZED HAND TRUCK



PERFECT FOR MOVING JUST ABOUT ANYTHING, INCLUDING:

- Special event rental items
- Tents, Tables, Chairs, Stakes
- Inflatables
- HP Gas Cylinders
- Trailers
- Appliances
- Tile
- Cement blocks/bags
- HVAC Equipment



MAGLINER®

www.aelift.com

📍 Allstate Equipment Company Inc
1201 McCloud Rd | Chesapeake, VA 23320 | USA
☎ 757-545-1900
✉ sales@aelift.com