



757-545-1900 www.aelift.com



DIMENSIONS

TUB OPTIONS





P/N	CAP.	VOL.	WT.
	(LBS.)	(CU. FT.)	(LBS.)
460225	250	6	18



P/N	CAP. (LBS.)	VOL. (CU. FT.)	WT. (LBS.)	
460226	400	13.5	34	



SPECIFICATIONS

MODEL SHOWN

400 lbs.

13.5 cubic feet

164 lbs.

0-3 mph variable

24 Volts DC

6-9 hours

3-6 hours

P/N	CAP. (LBS.)	VOL. (CU. FT.)	WT. (LBS.)	
460227	750	27	58	

OVERALL DIMENSIONS - CHASSIS AND TUB

56 25 40	L"	W"	Н"
	56	25	40

L"	W"	H"
68	27	45

ı	L"	W"	Η"
	81	33	51

DRIVE WHEEL OPTIONS



P/N	D"	WT.(LBS.)
10993	13	10
e en le l		

Foam filled tire is maintenance free.



P/N	D"	WT.(LBS.)
10992	13	8

Tube-type pneumatic tire.



MALANN	

P/N	D"	WT.(LBS.)
10995L 10995R	13	8

Tube-type pneumatic tire with aggressive tread pattern.






P/N	D"	WT.(LBS.)
10100L 10100R	13	18

Tube-type dual pneumatic tires with aggressive tread pattern. Increases truck overall width to 33.5".

POWERED EQUIPMENT FEATURES



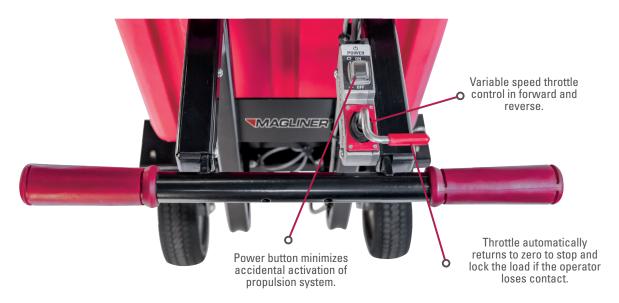



PERFECT FOR MOVING JUST ABOUT ANYTHING, INCLUDING:

- Mulch, soil, gravel
- Lawn and garden equipment
- Horse and barn equipment
- Refuse
- Bulky, oversized loads



www.aelift.com

- ♥ Allstate Equipment Company Inc 1201 McCloud Rd | Chesapeake, VA 23320 | USA
- **5757-545-1900**
- sales@aelift.com