

POWERED STAIR CLIMBING HAND TRUCK

*FASTER, SAFER DELIVERIES
ON STAIRS*



POWERED STAIR CLIMBING HAND TRUCK

*Extremely Fast and Light Stair Climbers
for Loads up to 375 lbs.*



P/N
CLK170EGS4




P/N
CLK140UWL4



*Folds easily for
convenient storage
when not in use.*

P/N
CLK110FNG4

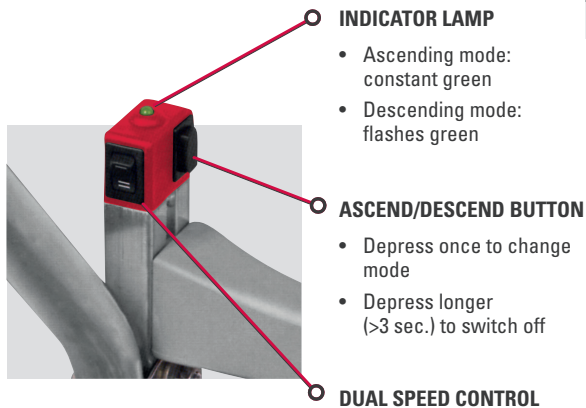

- Lightweight aluminum construction and ergonomic design promote proper posture and reduce awkward movements by operator
- Takes only 1.5 hours to charge a totally discharged battery to 90%
- Sliding clutch and electronic overload protection
- Reduces force needed to move loads up and down stairs
- Curved-back frame for kegs and cylinders
- Power assist in climbing and descending modes
- Multiple ascent speeds
- Choose ergonomic or universal design handles

	SPECIFICATIONS		
	CLK170EGS4	CLK140UWL4	CLK110FNG4
Capacity	375 lbs.	300 lbs.	240 lbs.
Maximum speed (steps per minute)	29	35	48
Weight (without battery)	35 lbs.	35 lbs.	35 lbs.
Maximum step height	8"	8"	8"
Overall height	62"	60"	39-1/2" folded 57" unfolded
Width	19"	19"	19"
Depth	18" to 24" depending on nose	18" to 24" depending on nose	11-1/2" folded
Battery capacity approximate steps (with maximum load)	220 steps	220 steps	220 steps
Battery capacity approximate steps (with half-load)	300 steps	300 steps	300 steps

U.S. Patent: www.magliner.com/patents

POWERED STAIR CLIMBING HAND TRUCK

*Heavy Duty, Versatile Stair Climbers
for Loads up to 725 lbs.*




HD UNIVERSAL
HDL360U



HD FOLD
HDL360F



HD UNIVERSAL WITH 4TH
WHEEL ATTACHMENT
HDL360U-4W

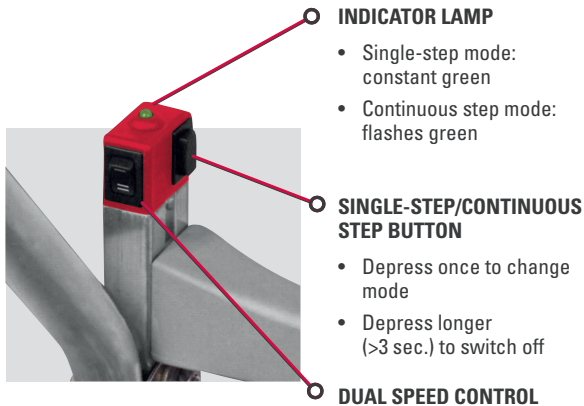

INDICATOR LAMP

- Single-step mode: constant green
- Continuous step mode: flashes green

SINGLE-STEP/CONTINUOUS STEP BUTTON

- Depress once to change mode
- Depress longer (>3 sec.) to switch off

DUAL SPEED CONTROL



STEP EDGE BRAKE SYSTEM
GUARANTEES THE HIGHEST
LEVEL OF SAFETY.


SPECIFICATIONS

	UNIVERSAL HDL360U	FOLD HDL360F	UNIVERSAL 4W HDL360U-4W
Capacity	725 lbs.	725 lbs.	725 lbs.
Maximum speed (steps per minute)	10	10	10
Weight (without battery)	75 lbs.	77 lbs.	88 lbs.
Maximum step height	8"	8"	8"
Overall height	64"	47" (folded) 70" (unfolded)	64"
Width	22"	22"	22"
Depth	19"	19"	19"
Battery capacity approximate steps (with maximum load)	120 steps	120 steps	120 steps
Battery capacity approximate steps (with half-load)	220 steps	220 steps	220 steps

POWERED STAIR CLIMBING HAND TRUCK


Options & Accessories

NOSES



P/N	W"	D"	WT.(LBS.)
930030	18.8	9.4	4.0
930018	14	7	2.25
930003	16.5	13.4	4.0

Grooved nose plate with beveled edge slides easily under loads. Not compatible with HD models.



P/N	W"	D"	WT.(LBS.)
930085	17.7	7.5	4.0
930084	18.8	9.4	5.0


Solid nose plate with beveled edge slides easily under loads. Not compatible with HD models.

WHEELS



P/N	D"	WT.(LBS.)
030245	10	2.75

10" 4-ply tubed pneumatic wheel with precision bearings. Not compatible with HD models.



P/N	D"	WT.(LBS.)
930148	10	5.1

10" non-marking microcellular, puncture-proof wheel with precision bearings. Not compatible with HD models.

ACCESSORIES



P/N	WT.(LBS.)
930145 Full Kit	0.5
930140 Clip Only	0.5

Battery securing clip holds the battery firmly in place in high impact situations.



P/N	WT.(LBS.)
930114	2.0

In-transit DC battery charger conveniently charges using the vehicle's lighter.



P/N	L"	W"	WT.(LBS.)
930123	138	2	1.0
930156	165	2	1.25

Heavy duty containment straps hold product in place during transport.



P/N	WT.(LBS.)
930108	1.0

Keg hook holds keg in place securely during delivery. Not compatible with HD models.

FASTER, SAFER DELIVERIES ON STAIRS



www.aelift.com

Allstate Equipment Company Inc
 1201 McCloud Rd | Chesapeake, VA 23320 | USA
 757-545-1900
 sales@aelift.com